PowerWash™ T5 3 Foot Suspended 39 Watt High Output Fluorescent

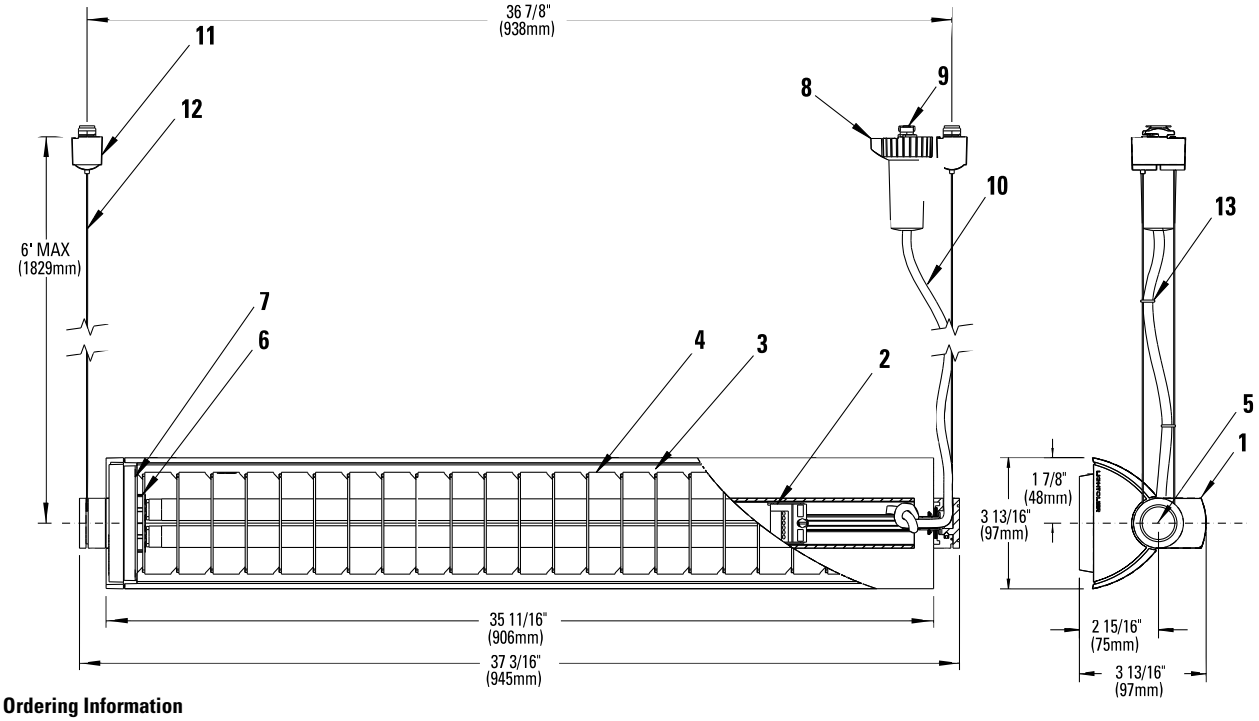

Ordering Information

Catalog No.	Finishes	Track Mountings	Lamps
9379WH	Matte White	Compatible with all Lytespan® Track Systems. Not compatible with ProSpec Track, Clamp-On Monopoint, Slope Ceiling Adapter or Extension Wands.	2 x 39w T5 High Output (Fluorescent)
9379TM	Dark Titanium		
9379AL	Metallic Aluminum		
9380WH	Matte White		1 x 39w T5 High Output (Fluorescent)
9380TM	Dark Titanium		
9380AL	Metallic Aluminum		

Features

1. **Ballast & Reflector Housing:** Aluminum with die-cast endcaps.
2. **Ballast:** 39w electronic ballast.
3. **Flood Reflector:** Aluminum with high reflectivity and semispecular finish for a smooth wash of light.
4. **Louver:** Aluminum for glare control with captive locking springs for easy installation and removal.
5. **Vertical Pivot:** Die cast rotation housing with positive rotation stop provides 360° max. vertical rotation for uplight and downlight aiming.
6. **Sockets:** 600v rated mini bi pin sockets with 90° rotor lock to engage contacts and retain with a positive detent.
7. **Socket Bracket:** Adjustable steel mounting bracket slides out for easy lamping.
8. **Power Stem:** High temperature molded polycarbonate, secures mechanically into track and makes electrical contact to energize the luminaire.
9. **Brass Contact:** Extends for connection to second circuit in Advent® Lytespan track.
10. **Power Cord:** 18ga, 105°C, SVT insulated flexible cord. 6' supplied.
11. **Cable Suspension Housing:** Molded polycarbonate with grip-lock™ cable wrap-around feature for suspension height adjustability, covers with snap-in feature.
12. **Dual Cable Suspension:** 1/32" diameter stranded stainless steel cable, up to 6' max suspension adjustability from ceiling.
13. **Cord Retainer:** Attaches to suspension cable for neat cord dressing suspension.

Electrical

Rapid Start High Power Factor, Class P Electronic Ballast
Power Factor: >.97%
Sound Rated: A
Minimum Start Temp: 0°F

Input Watts:	9379	85W
	9380	43W

Finish

All painted finishes are baked enamel.

Labels

UL, c.U.L.

Advent® is a registered trademark of Lightolier.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • B0902

LIGHTOLIER®

Lighting Data 2-39W T5 High output

Footcandles on wall:

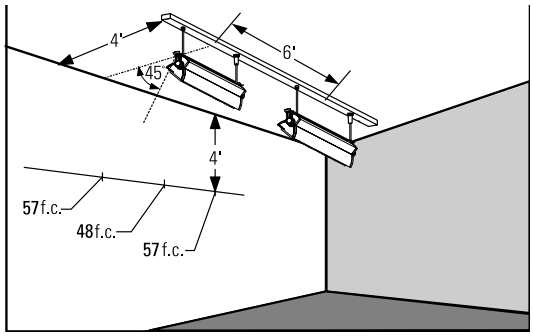

EXAMPLE: With track located 4' from wall and multiple units spaced 6' on center and aimed 45° from horizontal, the illumination on wall 4' from luminaire will be 57 f.c. beneath units and 48 f.c. between units.

Lamp Information:
2 X 39W T5 High Output
Mini Bi-Pin Fluorescent (9379)
1 x 39W T5 High Output
Mini Bi Pin Fluorescent (9380)

Two Lamps, without louver, aimed 45° up.



Two Lamps, with louver, aimed 45° down.



One Lamp, with louver, aimed 45° down.



Footcandles on Wall

Track 3 Feet From Wall



Distance From Luminaire	Single Unit 0'	1'	2'	3'	4'	5'	4' Multiple Units 0'	1'	2'	5' Multiple Units 0'	1'	2'	6' Multiple Units 0'	1'	2'
	Beam Center														
1'	157	132	76	36	17	9	196	166	196	178	114	178	170	77	170
2'	123	106	65	32	14	6	153	136	153	136	95	136	129	65	129
3'	78	69	47	27	13	6	107	100	107	91	74	91	84	54	84
4'	51	46	34	22	13	7	83	80	83	70	62	70	63	50	63
5'	30	27	21	15	9	6	50	49	50	41	38	41	35	30	36
6'	19	18	15	11	8	5	40	39	40	33	32	33	29	26	29
7'	12	12	10	8	6	4	27	27	27	22	21	22	19	18	19
8'	8	8	7	5	4	3	19	19	19	15	15	15	13	13	13
9'	6	6	5	4	3	3	16	16	16	13	13	13	11	11	11

Track 4 Feet From Wall



Distance From Luminaire	Single Unit 0'	1'	2'	3'	4'	5'	4' Multiple Units 0'	1'	2'	5' Multiple Units 0'	1'	2'	6' Multiple Units 0'	1'	2'
	Beam Center														
1'	87	75	48	24	10	3	105	97	105	92	69	92	87	48	87
2'	86	76	53	31	16	7	117	111	117	100	82	100	92	60	92
3'	65	58	43	27	15	8	96	93	96	80	70	80	71	53	71
4'	47	43	33	23	15	9	79	77	79	65	60	65	57	48	57
5'	34	32	26	19	13	9	66	64	66	54	51	54	47	42	47
6'	23	21	18	14	10	7	47	46	47	38	37	38	33	30	33
7'	16	15	13	10	8	6	35	35	35	29	28	29	25	23	25
8'	11	11	9	8	6	5	29	29	29	24	24	24	21	20	21
9'	8	8	7	6	5	4	22	22	22	18	18	18	16	15	16

Track 5 Feet From Wall



Distance From Luminaire	Single Unit 0'	1'	2'	3'	4'	5'	4' Multiple Units 0'	1'	2'	5' Multiple Units 0'	1'	2'	6' Multiple Units 0'	1'	2'
	Beam Center														
1'	61	55	41	27	16	10	99	96	99	83	74	83	74	58	74
2'	62	56	43	29	18	11	104	102	104	87	80	87	77	63	77
3'	55	51	40	28	18	12	101	99	101	84	79	84	75	64	75
4'	40	38	30	22	15	10	77	76	77	63	60	63	54	49	54
5'	31	29	24	18	13	9	63	62	63	51	49	51	44	41	44
6'	24	22	19	15	12	8	53	53	53	44	42	44	37	35	37
7'	18	17	15	12	10	7	43	43	43	36	35	36	31	29	31
8'	13	12	11	9	7	6	32	32	32	26	26	26	22	22	22
9'	10	9	8	7	6	5	27	27	27	22	22	22	19	19	19

Footcandles are average and rounded off and data for multiple units are based on a minimum of five units.

Job Information **Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • B0902

LIGHTOLIER®